

ASAHIKLIN

AsahiKlin™ AE3000ATE

Product Description

Asahiklin AE3000ATE, a mixture of Trans-1,2-Dichloroethylene, 1,1,2,2-tetrafluoroethyl-2,2,2-trifluoroethyl ether, ethanol, is a non-flammable, non-ozone depleting solvent.

Applications

- Defluxing of printed wiring assemblies
- Precision cleaning of plastics, substrates, electrical components, metals, and particle removal
- Drying agent after cleaning with hydrocarbons or alcohols
- Drying agent after aqueous cleaning
- Replacement for HCFC, perchloroethylene, trichloroethylene, Dupont™ Vertrel®, & 3M™ Novec™ solvents

Benefits

- Non-flammable
- Non-corrosive
- Superior drying property
- Excellent permeability
- Recyclable
- Low global warming potential (GWP)
- Zero ozone depletion potential (ODP)
- No surfactants necessary
- Recoverable by simple distillation
- Can be used with ultrasonics
- Material compatibility with a wide variety of metals, plastics, and elastomers
- Excellent thermal, chemical, and hydrolytic stability
- Low surface tension, low viscosity, high liquid density

Material Composition

Trans-1,2-dichloroethylene	46-55%
1,1,2,2-tetrafluoroethyl-2,2,2-trifluoroethyl ether	43-52%
Ethanol	1-3%

ASAHIKLIN

AsahiKlin™ AE3000ATE


Physical Properties

Boiling Point	42°C (107.6°F)
Melting Point	-50°C
Density (g/cm ³ , 25°C)	1.35
Viscosity (cST, 25°C)	0.34
Specific Heat (kJ/kg K, 25°C)	1.40
Surface Tension (dyne/cm/ 25°C)	18
Latent Heat of Vaporization (KJ/kg, 39°C)	200
Relative Evaporation Rate (Ether=100)	92
Flash Point (Open/Closed Cup)	None
KB Value	38


Cleaning Procedures

It is recommended that Asahiklin AE3000ATE be used in a vapor degreaser to optimize cleaning efficiency, economy, and emission control. Cleaning procedures for Asahiklin AE3000ATE are quite similar to those of AK225 products. The procedures consist of immersing a workload into the boiling solvent, rinsing or spraying with cool solvent and drying in solvent vapor.


Density vs. Temperature

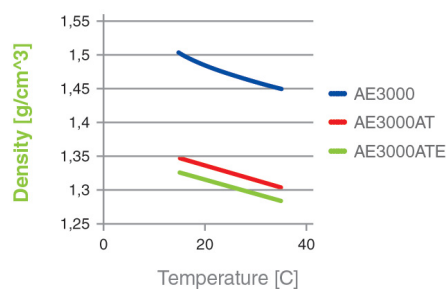

Vapor Pressure vs. Temperature

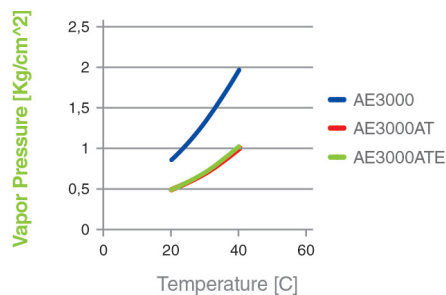

Viscosity vs. Temperature

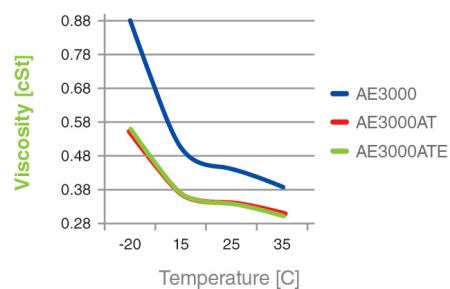

Material Compatibility

Asahiklin AE3000ATE has a broad range of compatibilities.

Effect of Asahiklin AE3000ATE on Unstressed Plastics at the Boiling Point.

	At boiling for 5min			At boiling for 3 days		
	Weight change (%)	Linear Swell (%)	Extractables (%)	Weight change (%)	Linear Swell (%)	Extractables (%)
Polyvinyl chloride (rigid)	3.8	4.0	<0.1	43.5	45	0.8
Polyvinyl chloride (plasticized)	23.5	19.0	5.8	-7.4	-17.5	26.8
Polyethylene (HP)	8.6	6.0	<0.1	110.4	affected	1.1
Polyethylene (LP)	1.5	1.5	<0.1	16.3	12.8	2.4
Polypropylene	2.4	1.8	0.3	31.0	22.1	1.0
Polystyrene	31.2	16.9	0.8	affected	affected	105.8
Polycarbonate	17.2	23.2	0.2	36	65.2	1.0
Polyacetal	0.4	0.4	<0.1	11.4	13.1	0.4
Polyphenylene oxide	34.0	20.3	1.2	107.6	affected	10.6
Phenolic	0.2	0.2	<0.1	11.4	11.4	1.2
ABS	45.5	23.7	0.9	181	affected	4.5
Nylon6	<0.1	-4.0	0.3	8.5	2.8	0.1
Nylon66	0.2	-0.1	0.2	7.3	7.5	0.2
Polyester (FR)	3.1	3.0	0.2	76.8	134.7	5.3
PTFE	0.1	0.2	<0.1	2.6	3.9	0.1
PCTFE	0.2	0.7	<0.1	10.4	16.2	<0.1
Epoxy (FR)	0.4	0.5	<0.1	7.4	12	0.1
Polyphenylene sulfide	0.1	-0.9	<0.1	3.8	4.8	0.1
Polybutylene terephthalate	1.0	1.2	<0.1	13.5	12.3	0.6
Polyethylene terephthalate	25.9	22.2	0.3	71.4	78	2.6

Note: negative numbers denote shrinkage

ASAHIKLIN

AsahiKlin™ AE3000ATE

Effect of Asahiklin AE3000ATE on Elastomers at the Boiling Point.

	At boiling for 5min			At boiling for 3 days		
	Weight change (%)	Linear Swell (%)	Extractables (%)	Weight change (%)	Linear Swell (%)	Extractables (%)
Polysulfide rubber FA(T)	19.8	16.4	1.9	63.8	50.1	13.6
Natural rubber (NR)	23.0	20.9	1.3	46.7	33.9	12.7
Urethane rubber (UR)	40.0	35.8	6.0	178.6	129.7	13.2
Isobutylene isoprene rubber (IIR)	18.3	15.6	3.2	38.1	29	14.3
Polychloroprene (CR)	18.7	17.8	<0.1	31.8	28	14.2
Fluoroelastomer E (FKM)	11.1	14.6	<0.1	84.2	109.5	3.8
Chlorosulfonated polyethylene (CSM)	15.2	13.0	2.1	32.4	27	12.7
Silicone rubber (Q)	66.7	54.8	0.5	167	128.6	2.5
Nitril rubber (NBR)	29.1	27.0	3.2	66.2	59.9	13.5
Ethylene propylene diene terpolymer (EPDM)	16.1	13.6	4.2	16.7	7.8	18.6

Effect of Asahiklin AE3000ATE Viton and PTFE at the Boiling Point.

	At boiling for 7 days		
	Weight change (%)	Linear Swell (%)	Extractables (%)
Viton (FDA White)	57.1	53.9	0.9
Viton (Chemical Resistant)	90.5	68.4	1.2
Viton (Low Temp)	71.2	54.6	0.2
Viton	72.0	60.4	6.8
PTFE	2.7	1.1	<0.1

ASAHIKLIN

AsahiKlin™ AE3000ATE

Environmental Properties

Properties	Asahiklin AE3000ATE
Ozone Depletion Potential (ODP) ¹	None
Global Warming Potential (GWP) ²	*274
Flash Point	None

¹ CFC-11 = 1.0

² CO₂ = 1.0, 100yr ITH

* Calculated value by the AIST

Environmental Health and Safety

Please read the current product Material Safety Data Sheet (available through your AGCCA technical service representative) and the precautionary statement on the product package prior to use. Follow all applicable precautions and directions.

ASAHIKLIN AE3000ATE is nonflammable. The solvent acts as an azeotrope and is resistant to thermal breakdown and hydrolysis during storage and use. Recommended handling procedures are provided in the Material Safety Data Sheet, which is available from your AGCCA representative upon request.

**AGC Chemicals Company
AGC Inc.**

Shin-Marunouchi Bldg.
1-5-1 Marunouchi
Chiyoda-ku, Tokyo
100-8405 Japan
Tel: +81-3-3218-5438
www.agc-chemicals.com

AGC Asia Pacific Pte., Ltd.

460 Alexandra Road
#32-01 mTower
Singapore 119963
Tel: +65 6273 5656
www.agc-asiapacific.com

**AGC Chemicals Trading
(Shanghai) Inc.**

Room 4008/09, F40, T1
Raffles City Changning
No.1133 Changning Road
Shanghai, China 200051
Tel: +86-21-6386-2211
www.agcsh.com

**AGC Chemicals
(Thailand) Co., Ltd.**

944 Mitrtown Office Tower, 14th Floor
Rama 4 Road, Wangmai Sub-District
Pathumwan District, Bangkok 10330
Thailand
Tel: +66-2-092-6499
www.acth.co.th

AGC Chemicals Europe, Ltd.

Hillhouse International
Fleetwood Road North
Thornton-Cleveleys
FY5 4QD
United Kingdom
Tel: +44 (0) 1253 209560
www.agcce.com

**AGC Chemicals Europe, Ltd.
Commercial Centre**

World Trade Center, Zuidplein 80
1077 XV Amsterdam, Netherlands
Tel: +31-(0)-20-880-41-70
www.agcce.com

AGC Chemicals RUS

Russian Federation, 121596
Moscow, Gorbunova Street 2
Grand Setun Plaza, Bldg. 204, BC
5th Floor, Block B, Office B 504
Tel: +7-918-555-34-37
www.agcce.com

AGC Vidros do Brasil Ltda.

Estrada Municipal Doutor Jaime
Eduardo Ribeiro Pereira, 500
Jardim Vista Alegre
Guaratinguetá, SP, Brasil
CEP 12523-671
Tel: +55 12 3127-7100
www.agcchem.com/pt-br/



**Chemistry
for a Blue Planet**
AGC Chemicals

AGC

AGC Chemicals Americas, Inc.

55 E. Uwchlan Avenue, Suite 201
Exton, PA 19341
United States of America

Telephone: +1 610-423-4300
Toll Free (US only): 800-424-7833
Fax: +1 610-423-4305

www.agcchem.com

Visit our website for compliance information and industry certifications.

The information provided herein is related only to the specific product designated and may not be applicable where such product is used in combination with any other materials or in any process.

NO REPRESENTATION OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE, ARE MADE HEREUNDER.

The user of this product has the sole responsibility to determine the suitability of the product for any use and manner of use intended. This document may be revised after its issuance, and the user is advised to use the latest revision.

This information should be used as a guide only and not to establish specification limits or design criteria.